


PADGETT
TECHNOLOGIES, INC

WELDING CELLS FEATURING
POSITIONERS

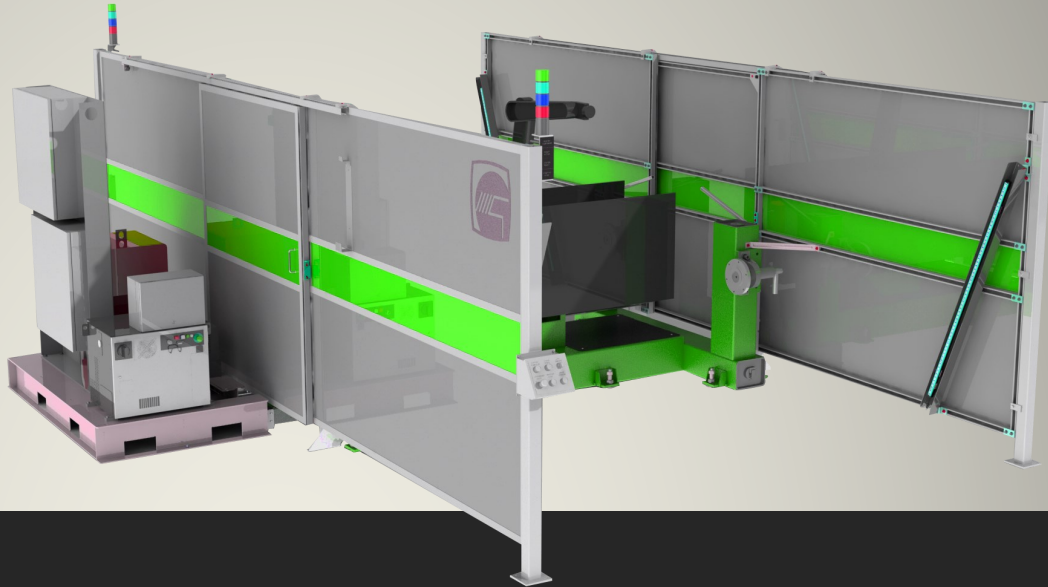

VERSA 2

Pre-Engineered Robotic Welding Solution

For welding low to medium-volume production parts & high changeover applications

VERSA 2 Weight Capacity: 1,000-lbs (per station)

Reduce Downtime During Fixture Changeover

✔ Reduces downtime during fixture changeover

A pre-engineered two-station robotic welding system that allows multiple part numbers to run simultaneously, the Genesis Versa 2 and Versa 2H (higher weight


✔ Can run multiple part numbers simultaneously

✔ Able to accommodate large tool lengths and Swing diameters


✔ Configurable to meet application requirements

PADGETTECHNOLOGIES.COM


VERSA 2

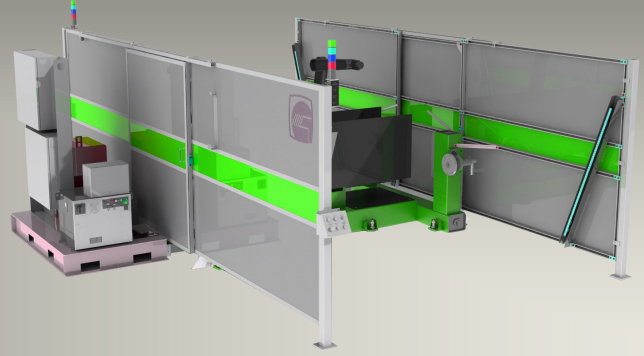

TOP VIEW

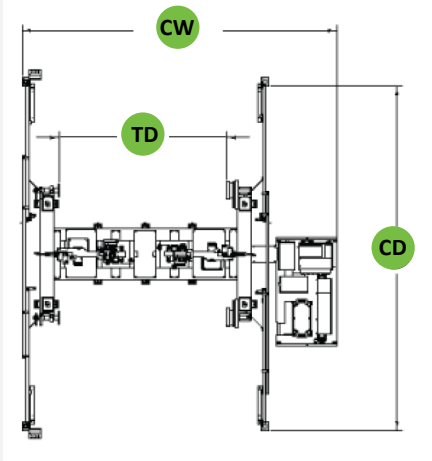

SIDE VIEW

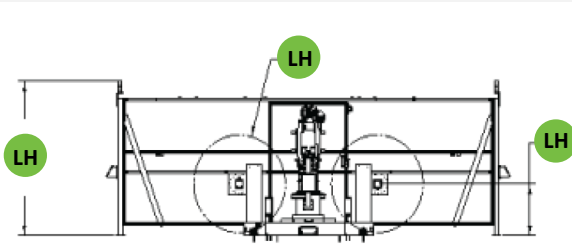

Standard Dimensional Specifications

- TL Tool Length:** 96-inches (2438-mm)
- SD Tool Swing Diameter:** 54-inches (1371-mm)
- LH Load Height:** 36-inches (914-mm)
- CW Cell Width:** 215-inches (5460-mm)
- CD Cell Depth:** 195-inches (4978-mm)
- CH Cell Height:** 92-inches (2336-mm)

Standard Component Options

- Robot Models:** FANUC, Panasonic, Yaskawa Motoman, ABB
- Process Gear:** Miller, Lincoln, Fronius
- Welding Torches:** TBi, Tregaskiss, Abicor Binzel, Fronius
- Torch Cleaners:** TBi, Tregaskiss, Abicor Binzel
- Controls:** Allen-Bradley

Platform Specifications

BASE

Minor axis	Dual servo driven trunnions
Tool length	96-inches (2.4-meters)
Tool swing diameter	54-inches (1.4-meters)
Weight capacity	2,000-lbs (907-kilograms)

OPTIONAL

120-inches (3.0-meters)
60-inches (1.5-meters)
3,000-lbs (1,360-kilograms)



915 Center St.
Cedar Falls, IA 50613
TEL: 319-268-6827

WWW.PADGETTECHNOLOGIES.COM