


# PALLET CELL

## DS-2

### Pre-Engineered Palletizing Solution

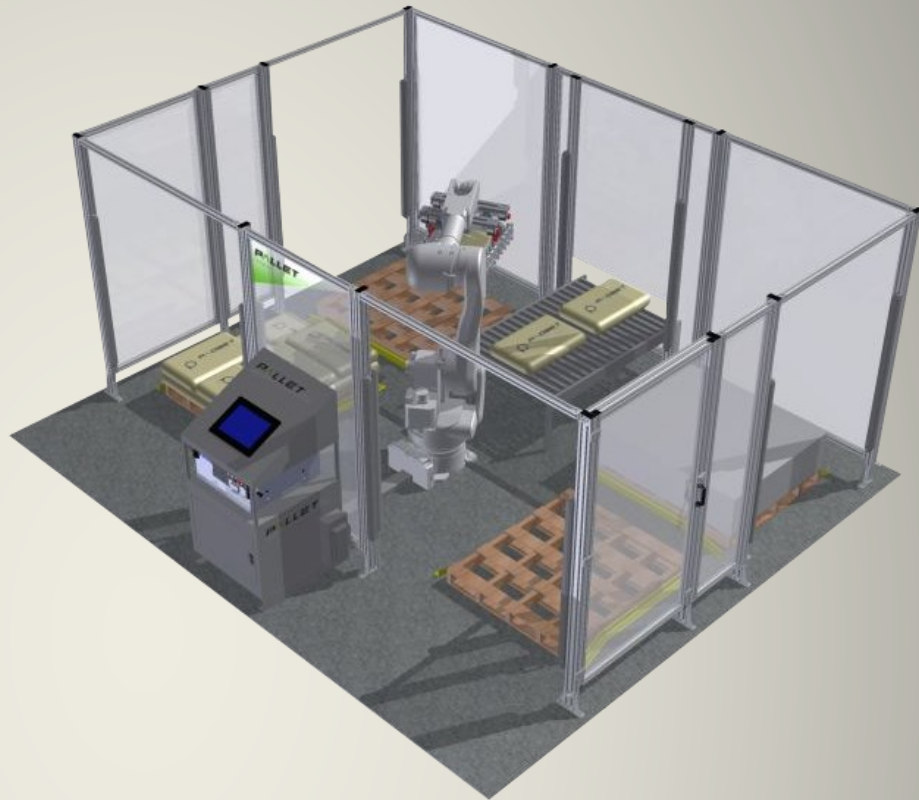


## Automated Pallet Loading and Expanded Add-On Options

### Advanced continuous palletizing with added automation capability


The DS-2 represents the most flexible and advanced setup for compact, efficient, hands-off palletizing. Available with numerous options for customization, this system can be configured to meet your every need.

- ✓ Fast, easy installation and setup
- ✓ For boxes, bags, or other stackable goods
- ✓ Proven design, reliable performance
- ✓ Compact footprint
- ✓ Add and change product dimensions and types
- ✓ Multiple options: shrink-wrapping, pallet conveyance, labeling, and more
- ✓ Intuitive touchscreen HMI
- ✓ Short lead times

## Model: DS-2

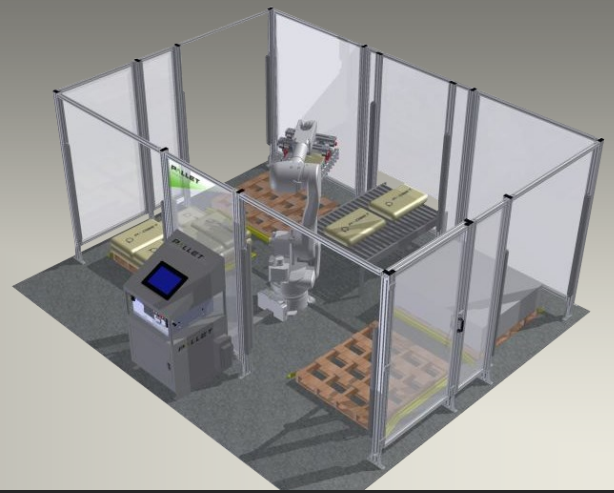

### TOP VIEW

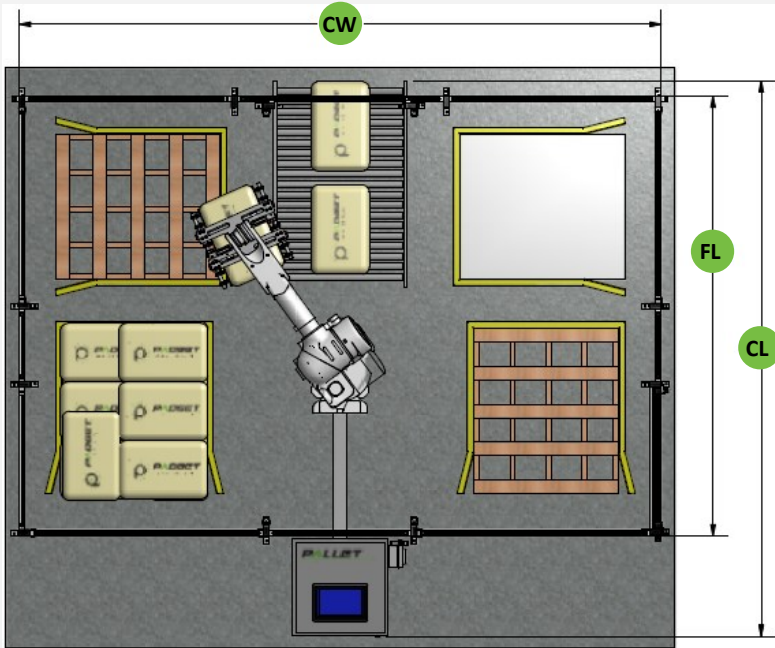

### Standard Dimensional Specifications

- CW** Cell Width: 15'-7"
- CL** Cell Length: 13'-5"
- FL** Fence Length: 10'-8"
- H** Overall Height: 7'-3"

### Standard Features

- Robot:** Kawasaki RD80 high-speed palletizing robot
- Infeed Conveyor:** Configured for boxes or bags
- Controls:** Allen Bradley with touch screen HMI

- EOAT:** Configured based on product being palletized
- Safety:** Light curtains, safety relays, interlocks, clear safety enclosure

### Options

- Auto pallet conveyance
- Shrink-wrapping
- Labeling
- Slip sheet magazine
- Scanning
- Tool changing
- Pallet feeding
- More on request

#### PAYLOAD UPGRADES

Cells can be upgraded to accommodate larger payloads by incorporating the Kawasaki CP series of palletizing robots along with other EOAT options.